


DOOR ASSEMBLY SERVICE KIT INSTALLATION INSTRUCTIONS MODEL 608 CONVECTION OVEN

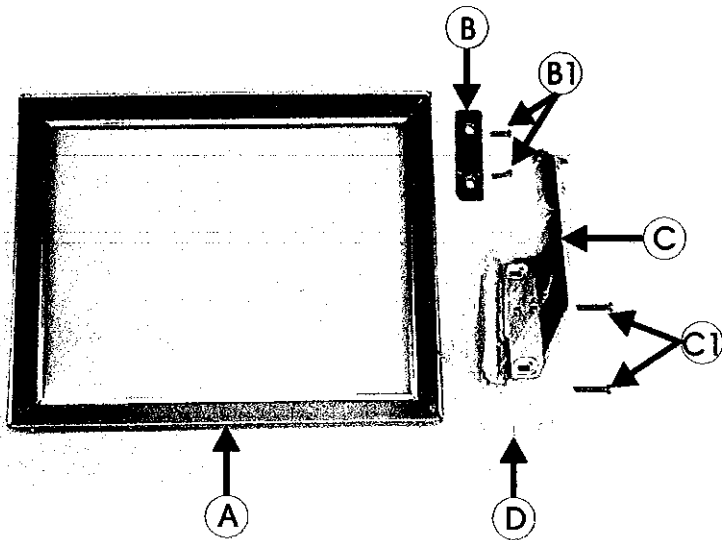

PARTS LIST

- (A) - #0017789 - OVEN DOOR ASSY. (1)
- (B) - #0017832 - STRIKE PLATE (1)
- (B1) - #0017757 - 10-32 x 3/4" FHMS (2)
- (C) - #0017834 - EDGEMOUNT LATCH R-27-1010-X (1)
- (C1) - #0021656 - 10-32 x 1-1/4" PHMS (2)
- (D) - #0017709 - SPACER 0.031 (1)

TOOLS REQUIRED:

PHILLIPS SCREWDRIVER
SMALL SCREWDRIVER

DOOR/LATCH REMOVAL:

- STEP 1:** Remove cosmetic hinge cover. The covers are a spring fit and are removed by sliding directly away from the door. It may be necessary to use a small screwdriver to encourage them initially.
- STEP 2:** Remove the (4) screws holding the hinges to the door. Remove the old door (complete w/ latch) and discard. Save the screws and hinge hardware.
- STEP 3:** Remove the (2) screws holding the strike plate and base. Remove strike plate and base. Discard both items.

DOOR/LATCH INSTALLATION:

- STEP 1:** Attach new STRIKE PLATE (B) to oven with enclosed SCREWS (B1).
- STEP 2:**
- Attach new DOOR ASSY. (A) to hinges using existing 4 screws.
 - Supplied SPACER (D) is installed between upper hinge and door.
 - Tighten the 4 screws holding the hinges to door just enough to allow repositioning of the ribbed channel locks and door.
 - The channel locks should be positioned evenly on the upper and lower hinges.
 - Press door against front panel and tighten hinge screws when desired seal is obtained.
- STEP 3:**
- Attach new LATCH (C) to door with supplied SCREWS (C1).
 - Use rubber gasket supplied with latch between door and handle. [NOTE: handle of latch faces up when installed]
 - Allow latch to attach to strike plate and tighten screws while pressing door against front panel for desired seal.
 - Operate latch and verify smooth action and proper door seal.
 - Readjust hinges and/or latch to achieve desired seal.
- STEP 4:** With door properly adjusted, install hinge covers and plastic screw covers for latch attaching screws.
[NOTE: Not all parts supplied with bagged latch are used in this installation.]